

PANTHER T9R



PAYLOAD
17,637 lb • 8,000 kg



SPEED
8.1 mph • 13 km/h



CAPACITY
6.5 yd³ • 5.0 m³



ENGINE

Make/Model/Type	Caterpillar C4.4 Diesel engine	
Emission Level	EPA Tier 4 Final / EU Stage V	
Max Power Output	201 HP @ 2200 rpm	150 kW @ 2200 rpm

TRANSMISSION

Hydrostatic variable displacement pumps and motors

UNDERCARRIAGE

Track Type	Metal-embedded rubber track (MERT)	
Track Width	27.6 in	700 mm
Ground Clearance	15.2 in	387 mm
Ground Pressure		
without load	3.0 psi	21 kPa
with load	5.3 psi	37 kPa

BRAKE

Service Brake	Wet Multiple Disk Brakes
---------------	--------------------------

PERFORMANCE

Payload	17,637 lb	8,000 kg
Travel Speed	8.1 mph	13 km/h
Dump Body Capacity		
Struck	5.0 yd ³	3.8 m ³
Heaped	6.5 yd ³	5.0 m ³
Operating Weight	23,717 lb	10,760 kg
Maximum Gradeability		
Uphill/Downhill	27%	15°
Side hill	27%	15°

FLUID CAPACITIES

Diesel Fuel	53 gal (US)	200 l
DEF / AdBlue [†]	5 gal (US)	19 l

ELECTRICAL SYSTEM

Voltage	12 V
Alternator Capacity	150 A
Battery Capacity	1150 CCA (two)

Pinoth[®]

EQUIPMENT

STANDARD EQUIPMENT

Operator environment

Spacious wide cab – 1 person
Tilt and telescopic steering wheel
Foot throttle pedal
Operator seat with suspension and adjustments
Air conditioning
Adjustable temperature, fan control and fresh air intake
Three-point seat belt
Front and rear wipers with adjustable speeds
Windshield washer
Two exterior mirrors (right-side remotely adjustable)
Main display 4.3 in (111 mm)

Safety

Rear and side-view cameras
Inclinometer built-in display's with adjustable alarms
Parking brake condition on seat belt and armrest
Side window emergency exit
ROPS ISO 3471
Back-up alarm
Horn
First aid kit
Fire extinguisher

Electrical and Lighting

Batteries maintenance-free (two)
Working lights, LED (two front, one rear)
Battery disconnect switch

Other




Pressurized hydrostatic oil tank
Lockable compartments for fluids and batteries
D-ring for transportation (two)
Lockable door
Spare parts catalog
Operating and maintenance manuals

OPTIONAL EQUIPMENT

Bluetooth Radio, USB and AM/FM	FOPS ISO 3449	Front brushguard
Flashing LED beacon light	Engine block and hydraulic oil heaters	Emergency driving system
Trainer seat	Engine coolant heater	

DIMENSIONS

A 116.3 in	2,955 mm	L 58.9 in	1,495 mm
B 97.8 in	2,485 mm	M 83.9 in	2,131 mm
C 70.3 in	1,785 mm	N 176.5 in	4,482 mm
D 15.2 in	387 mm	O 91.2 in	2,316 mm
E 27.6 in	700 mm	P 111.2 in	2,825 mm
F 206.5 in	5,246 mm	r1 117.7 in	2,990 mm
G 177.1 in	4,498 mm	r2 110.7 in	2,811 mm
H 150.0 in	3,811 mm	a1 23°	
I 47.1 in	1,204 mm	a2 33°	
J 112.3 in	2,853 mm	a3 60°	
K 40.0 in	1,004 mm		

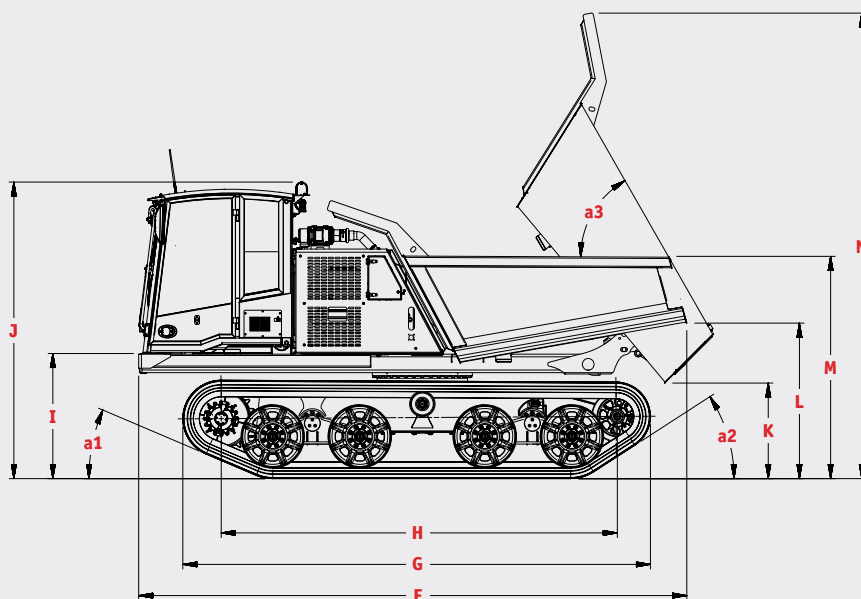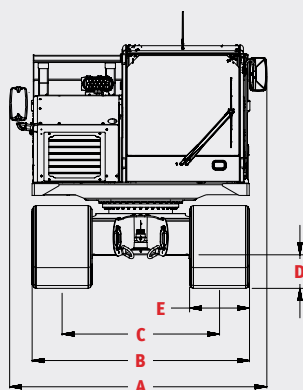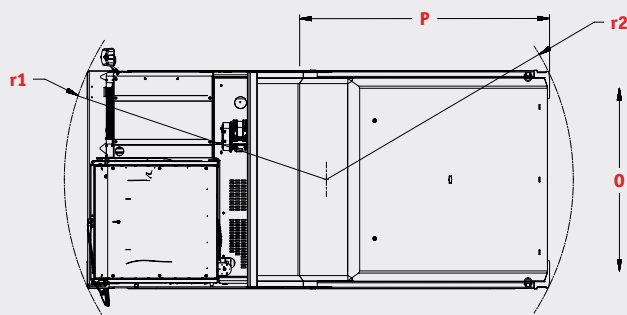

PRINOTH Ltd., 1001 J.-A. Bombardier Street, Granby QC J2J 1E9, CANADA

Service: 450-776-3663 after.sales.service.na@prinoth.com

Parts: 1-866-776-3636 parts.na@prinoth.com

Sales: 450-776 3600 sales.na@prinoth.com

Prinoth®