

PANTHER T12 CUA



PAYLOAD
25,000 lb • 11,340 kg



SPEED
8.4 mph • 13.5 km/h



CAPACITY
7.7 yd³ • 5.9 m³



ENGINE		
Make/Model/Type	Cummins B6.7 Diesel Engine	
Emission Level	EPA Tier 4 Final / EU Stage V	
Max Power Output	250 HP @2200 rpm	186 kW @2200 rpm
TRANSMISSION		
	Hydrostatic variable displacement pumps and motors	
UNDERCARRIAGE		
Track Type	Metal-embedded rubber track (MERT)	
Track Width	29,5 in	750 mm
Ground Clearance	21 in	530 mm
Ground Pressure		
without load	3.50 psi	24.13 kPa
with load	6.20 psi	42.75 kPa
BRAKE		
Service Brake	Wet Multiple Disk Brakes	
PERFORMANCE		
Payload Dump Body	25,000 lb	11,340 kg
Payload Bare Chassis	28,793 lb	13,060 kg
Operating Weight		
Unloaded Dump Body	32,673 lb	14,820 kg
Travel Speed	8.4 mph	13.5 km/h
Dump Body Capacity		
Struck	6.4 yd ³	4.9 m ³
Heaped	7.7 yd ³	5.9 m ³
Maximum Gradeability		
Uphill/Downhill	60%	31°
Side hill	40%	21.8°
FLUID CAPACITIES		
Diesel Fuel	65 gal (US)	245 l
DEF / AdBlue ¹	8.3 gal (US)	31.5 l
ELECTRICAL SYSTEM		
Voltage	12 V	
Alternator Capacity	150 A	
Battery Capacity	1150 CCA (two)	

Pinoth[®]

EQUIPMENT

STANDARD EQUIPMENT • BARE CHASSIS

Operator environment	Safety	Electrical and Lighting
Narrow cab – 1 person	Parking brake linked to seat belt	Working lights, LED (two front, one rear)
Tilt and telescopic steering wheel	Side window emergency exit	Batteries maintenance-free (two)
Foot throttle pedal	ROPS ISO 3471	Battery disconnect switch
Operator seat with suspension and adjustments	Back-up alarm	
Air conditioning	Horn	Other
Adjustable temperature, fan control and fresh air intake	First aid kit	Pressurized hydrostatic oil tank
Three-point seat belt	Fire extinguisher	Lockable compartments for fluids and batteries
Front and rear wipers with adjustable speeds		D-ring for transportation (four)
Windshield washer		Lockable door
Two exterior mirrors (right-side remotely adjustable)		Spare parts catalog
Main display 4.3 in (111 mm)		Operating and maintenance manuals

OPTIONAL EQUIPMENT

Dump body	Flashing LED beacon light	Engine coolant heater
Tilt deck	Inclinometer built into display with adjustable alarms	Front frame extensions
Spacious wide cab – 1 person (avail. with Dump Body option only)	Heated mirrors	Front winch 30,000 lb / 13,608 kg
Trainer seat	Front brushguard	Power take off adaptors
Bluetooth Radio, USB and AM/FM	FOPS ISO 3449	Implement-ready Electronic kit
Rear view camera	Engine block and hydraulic oil heaters	



DIMENSIONS

A	110.3 in	2,801 mm
B	101.2 in	2,570 mm
C	71.7 in	1,820 mm
D	20.9 in	530 mm
E	29.5 in	750 mm
F	240.4 in	6,107 mm

G	214.8 in	5,456 mm
H	181.7 in	4,615 mm
I	50.6 in	1,285 mm
J	114.9 in	2,918 mm
K	44.2 in	1,123 mm
L	68.0 in	1,727 mm

M	87.4 in	2,219 mm
N	198.1 in	5,033 mm
a1	43°	
a2	33°	
a3	59°	

Dump Body Width	83.1 in	2,112 mm
Dump Body Length	142.6 in	3,621 mm

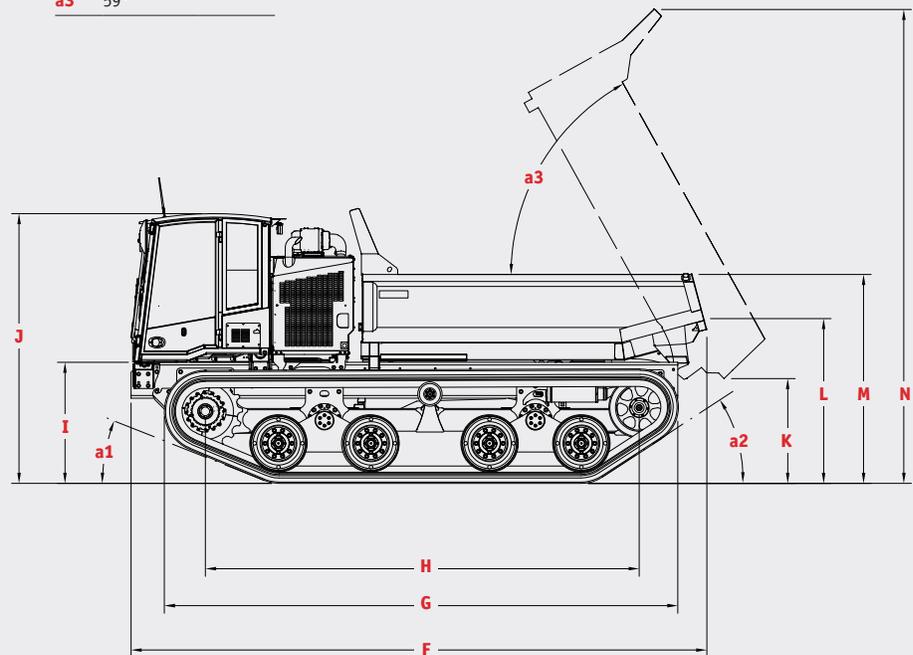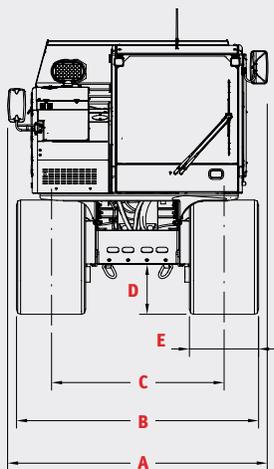

PRINOTH Ltd., 1001 J.-A. Bombardier Street, Granby QC J2J 1E9, CANADA
 Service: 450-776-3663 after.sales.service.na@prinoth.com
 Parts: 1-866-776-3636 parts.na@prinoth.com
 Sales: 450-776 3600 sales.na@prinoth.com

Prinoth